


**PRODUCT DESCRIPTION: Multilayer Engineered flooring-Oak Flex slim collection with 2.5mm top layer**

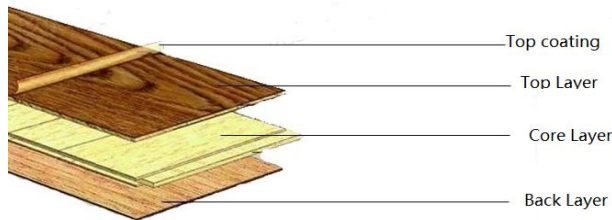

**1.MATERIAL**(Components and specification)

Multilayer engineered flooring elements: top layer - oak,middle layer- Eucalyptus, bottom layer-Poplar.

<b>Pattern of surface</b>	1-row strip(full plank)
<b>Finishing</b>	<b>Matt Lacquer</b>  Finished with 7 Layers; 5 layers of basic coating + 2 layers of top coating Gloss: 5-10%

Connection: T&G



**2.DIMENSIONS:**

Dimensions of ready product:

-length	1900mm	+/- 1,0mm
-width	150mm	+/- 0,2mm
-thickness	10mm	+/- 0,2mm
-top layer thickness	2.5mm	+/- 0,2mm

<b>Packet:</b>	<b>Pallet:</b>
12 boards=2.28m <sup>2</sup>	66 packet=150.48m <sup>2</sup>

- In a packet allows for 25% short boards

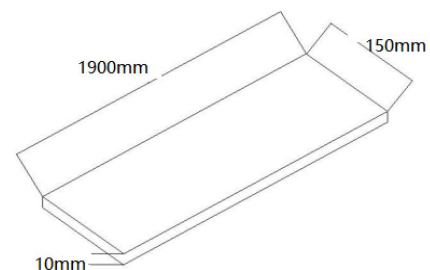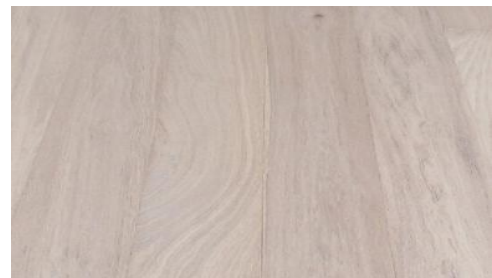

**3.Top layer characteristic**

Colour: MP01	White oak engineered flooring with brushed, UV Lacquered light white color Sapwood is stained naturally; The dead knots are close-filled with black putty;Natural wood should have reasonable color variation.
Hardeness:	Hard wood
Dimension stability:	Oak parquet has good stability.
Floor heating installation:	It is ok but No guarantee

### 3.1.Characteristics of grade

#### Classification according to EN 14342

Knots	No limitation for sound knots. unsound(filled with black putty)≤30mm Edge knots is not allowed
Sapwood	Length ≤ 1/3 of the plank length is allowed, Width ≤ 30% of the plank width is allowed; All planks with sapwood maximum 30% of the order quantity.
Surface & End splits	End Split:≤100mm, maximum 1 pcs in one plank; maximum 5% of total quantity Surface split:≤150mm, maximum 1 pcs in one plank; maximum 10% of total quantity
Bark pockets	up to 3 mm width and 50 mm length-acceptable(filled);brushing effect-acceptable
Lightning shake	unacceptable
Slope of grain/curly grain	acceptable
Heart of tree	acceptable
Colour variation	acceptable
Medullary rays	acceptable
Sticker marks	unacceptable
Rot	unacceptable

According to EN 14342

#### 4.Product characteristic

Lipping (between elements)[mm]	Not allowed
Deviation of rectangularity (on the item width)[mm]	≤0,2
Crosswise warping (across the item)[mm]	Not allowed
Spring (along the element) [mm]	≤3.8
Moisture content[%]	7-9%

#### 4.1.Finishing surface

Slipperiness	USRV 30
Adhesion to wood	Grade 3
Grindability	

#### 4.2.Physical and chemical properties

Reaction to fire	Dfl-s1
Emission of formaldehyde	E1
Contene of pentachlorophenol	NPD
Thermal conductivity	0,16 W/mk
Biological durability	class 1

#### 5.Product marking: CE

